

Acid Resistant Refractory Fire Brick High Alumina Fire Brick For Furnace Lining

Our Product Introduction

for more products please visit us on bricksrefractory.com

Basic Information

- Place of Origin: Zhengzhou ,China
- Brand Name: Rongsheng Xinwei
- Certification: ISO9001
- Model Number: LZ-48, LZ-55, LZ-65, LZ-70, LZ-75, LZ-80
- Minimum Order Quantity: 1 Ton
- Price: 200-800USD
- Packaging Details: packed on wooden pallets, with water-proof cover, and tightened with plastic/steel bandages
- Delivery Time: 20-30DAYS
- Payment Terms: TT; L/C
- Supply Ability: 2000tons /month



Product Specification

- Application Temperature: 1300-1700
- Chemical Composition: $Al_2O_3 \geq 70\%$
- Color: Red
- Compressive Strength: $\geq 50MPa$
- Density: 2.2-2.4g/cm³
- Flexural Strength: $\geq 10MPa$
- Material: High Alumina Refractory Brick
- Package: Wooden Box
- Porosity: $\leq 20\%$
- Refractoriness: ≥ 1700
- Refractoriness Under Load: ≥ 1400
- Shape: Rectangular
- Size: Customized
- Thermal Conductivity: $\leq 0.8W/m.k$
- Thermal Shock Resistance: Good



More Images




Product Description

Description of Acid Resistant Refractory Fire Brick High Alumina Fire Brick For Furnace Lining

High alumina brick is a kind of neutral refractory with alumina content above 48%. It is formed by shaping and calcining bauxite or other raw materials with high alumina content. High thermal stability and fire resistance above 1770 .

The production process of high alumina bricks is similar to that of multi clinker clay bricks. The difference is that the proportion of clinker in the ingredients is high, up to 90~95%. Before crushing, the clinker needs to be sorted and screened to remove iron. The firing temperature is high. For example, when high alumina bricks such as I and II are fired in tunnel kilns, it is generally 1500~1600 .

Our Product Introduction

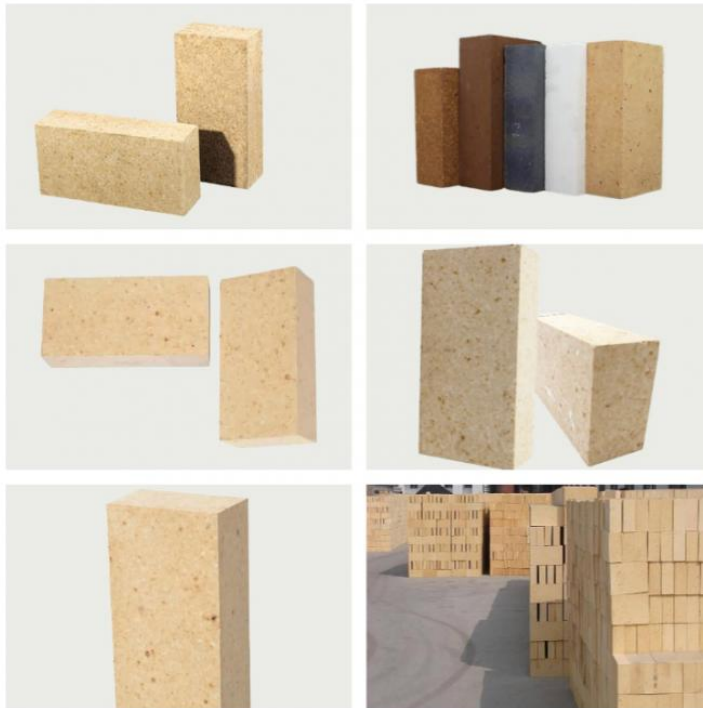

Feature of high alumina bricks

1. Good thermal conductivity.
2. High fire resistance.
3. Good slag resistance, acid and alkali resistance.
4. Thermal stability.

Appliaction Of High Alumina Refractory Bricks

As a basic material in the field of high-temperature technology, high alumina bricks are widely used in cement, glass building materials, steel smelting, petrochemical and other industries. High temperature industrial furnaces for high alumina bricks include blast furnace, hot blast furnace, electric furnace, blast furnace, reverberatory furnace and rotary kiln lining. In addition, high alumina bricks can also be processed into open hearth regenerative grid bricks, socket bricks for pouring system, nozzle bricks, etc. according to the requirements of industrial furnaces.

Product Specification of High Alumina Refractory Bricks

Item	Specification				
	LZ-80	LZ-75	LZ-70	LZ-65	LZ-55
Al ₂ O ₃ %	≥80	≥75	≥70	≥65	≥55
Apparent Porosity, %	≤21	≤24	≤24	≤24	≤22
CCS, MPa	≥70	≥60	≥55	≥50	≥45
0.2MPa RUL	≥1530	≥1520	≥1510	≥1500	≥1450
PLC, %	1500 ×2h			1450 ×2h	
	-0.4~0.2			-0.4~0.1	



Henan Rongsheng Xinwei New Materials Research Institute Co., Ltd



+86-18538509097



Jackyhan2023@outlook.com



bricksrefractory.com

11th Floors, Building 6, China Central Electronic Commerce Port, Daxue Road, Zhengzhou, Henan, China