

## Low Thermal Conductivity Refractory Fire Clay Brick Kiln Linings Fire Bricks

Our Product Introduction

for more products please visit us on [bricksrefractory.com](http://bricksrefractory.com)

### Basic Information

- Place of Origin: Zhengzhou, Henan, China
- Brand Name: Rongsheng Xinwei
- Certification: ISO Certification
- Model Number: SK-30, SK-32, SK-34, SK-35
- Minimum Order Quantity: 1 Ton
- Price: 200-800 USD
- Packaging Details: packed on wooden pallets, with water-proof cover, and tightened with plastic/steel bandages
- Delivery Time: 10-20 Days
- Payment Terms: TT; L/C
- Supply Ability: 2000 tons /month



### Product Specification

- Abrasion Resistance: High
- Chemical Resistance: High
- Color: Yellow
- Compressive Strength: High
- Density: High
- Durability: High
- Fire Resistance: High
- Flexural Strength: High
- Material: Clay
- Shape: Rectangular
- Size: Standard
- Surface: Smooth
- Texture: Fine
- Thermal Shock Resistance: High
- Water Absorption: Low



### More Images




### Product Description

#### Introduction of High-Quality Refractory Fire Clay Brick With Low Thermal Conductivity For High Temperature Kiln Lining

Refractory fire clay bricks are specialized bricks designed for use in high-temperature environments. Made from high-quality fire clay materials, they possess excellent thermal and chemical resistance properties. These bricks are widely used in industries like steelmaking, glass production, ceramics, and more, where they line furnaces, kilns, and other equipment subjected to extreme heat and corrosive conditions. Their durability and resistance to high temperatures make them a critical component in various industrial processes.

Our Product Introduction

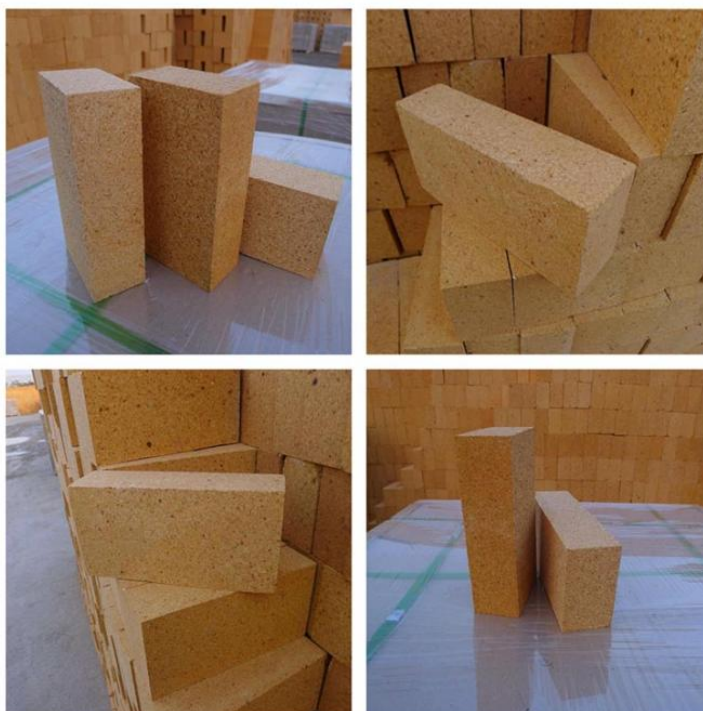

#### Features of Low Thermal Conductivity Refractory Fire Clay Brick

1. Low bulk density, low thermal conductivity, good thermal insulation performance.
2. Refractory category allow direct contact of fire, suitable for various atmosphere
3. Good integrity with furnace lining, long service life, easy operation, could be shaped freely
4. Product specification: standard form, normal standard, shaped and special shaped bricks.
5. Can be used in various kilns because of its cheapness and general tray package. Among all of the refractory materials, it is the most widely used.

#### Advantages of High-Quality Refractory Fire Clay Brick With Low Thermal Conductivity

Rongsheng Refractory factory directly supply  
 Competitive price, higher quality  
 Low MMO, Wholesale Only, Fast Delivery  
 Abundant Experience. Prevent cracks and twist in bricks.  
 Different Moulds. Save mould fees for you.  
 Strict Quality Control. Meet clients' quality requirement.  
 Large stocks. Guarantee prompt delivery.  
 Professional Packing. Avoid damage and secure the goods in transportation

#### Applications of Low Thermal Conductivity Refractory Fire Clay Brick

1. Furnaces of metallurgy industry, heat treatment furnace
  2. Furnaces of chemical industry and construction industry.
  3. Furnace of incineration of garbage, recirculating fluidized bed furnace
- Standard sizing: 230 x 114 x 65 mm others up to the client

#### Product Specification of Low Thermal Conductivity Refractory Fire Clay Brick

| Item/Grade                                | Fire clay brick |          |         |           | High alumina |         |    |
|-------------------------------------------|-----------------|----------|---------|-----------|--------------|---------|----|
|                                           | SK-30           | SK-32    | SK-34   | SK-35     | SK-36        | SK-37   | S  |
| AL <sub>2</sub> O <sub>3</sub> % (≥)      | 30              | 35       | 38      | 45        | 55           | 65      |    |
| Fe <sub>2</sub> O <sub>3</sub> % (≤)      | 2.5             | 2.5      | 2.0     | 2.0       | 2.0          | 2.0     |    |
| Refractoriness(SK)                        | 30              | 32       | 34      | 35        | 36           | 37      |    |
| Refractoriness under load, 0.2MPa, °C (≥) | 1250            | 1300     | 1360    | 1420      | 1450         | 1480    | 1  |
| Apparent porosity (%)                     | 22-26           | 20-24    | 20-22   | 18-20     | 20-23        | 20-23   | 2  |
| Bulk density (g/cm <sup>3</sup> )         | 1.9-2.0         | 1.95-2.1 | 2.1-2.2 | 2.15-2.22 | 2.25-2.4     | 2.3-2.5 | 2. |
| Cold crushing strength ,MPa (≥)           | 20              | 25       | 30      | 40        | 45           | 50      |    |



Henan Rongsheng Xinwei New Materials Research Institute Co., Ltd



+86-18538509097



Jackyhan2023@outlook.com



[bricksrefractory.com](http://bricksrefractory.com)

11th Floors, Building 6, China Central Electronic Commerce Port, Daxue Road, Zhengzhou, Henan, China