

55%-75% Alumina Magnesite Refractory Bricks Magnesia Carbon Bricks **Electric Arc Furnaces**

for more products please visit us on bricksrefractory.com

Basic Information • Place of Origin: Zhengzhou ,China • Brand Name: Rongsheng Xinwei • Certification: ISO9001 Model Number:

- Minimum Order Quantity:
- Price:
- Packaging Details:

- Supply Ability:

LMT55, LMT60, LMT65, LMT70, LMT75

1 Ton

packed on wooden pallets, with water-proof cover, and tightened with plastic/steel

200-800USD

bandages 20-30DAYS

- Delivery Time:
- Payment Terms: TT; L/C
 - 2000tons /month



Product Specification

 Abrasion Resistance: 	High
Chemical Resistance:	High
Color:	Gray
Compressive Strength:	High
 Density: 	High
Flexural Strength:	High
Material:	Magnesite
 Refractoriness: 	High
 Service Temperature: 	High
• Shape:	Bricks
• Size:	Standard
 Thermal Conductivity: 	Low
 Thermal Expansion: 	Low
 Thermal Shock Resistance: 	High
• Type:	Refractory

Product Description

Description of Alumina Magnesia Carbon Bricks With 55%-75% Alumina Content Are Used in Electric Arc Furnaces And Converters

The magnesia-carbon bricks produced by our company use high-purity, high-density fused magnesia, large crystal magnesia, and high-purity flake graphite as the main raw materials, add an appropriate amount of antioxidants, and use phenolic resin as a binder. to make. The series of alumina-magnesia-carbon bricks produced are mainly made of corundum, super-high alumina bauxite, fused magnesia and high-purity flake graphite, with phenolic resin as a binder, and are produced by high-pressure forming and low-temperature baking processes. It has good thermal strength and slag resistance, and is suitable for the wall and bottom of small and medium ladles.




Features of Magnesia Carbon brick

Excellent slag resistance
High strength and erosion resistance
Excellent thermal shock stability
long service life
High temperature resistance

Application of Magnesia carbon brick:

Magnesia-carbon bricks are mainly suitable for refining ladle or slag line of large ladle. Different grades of magnesiacarbon

bricks can be selected according to different smelting conditions and smelting steel grades.

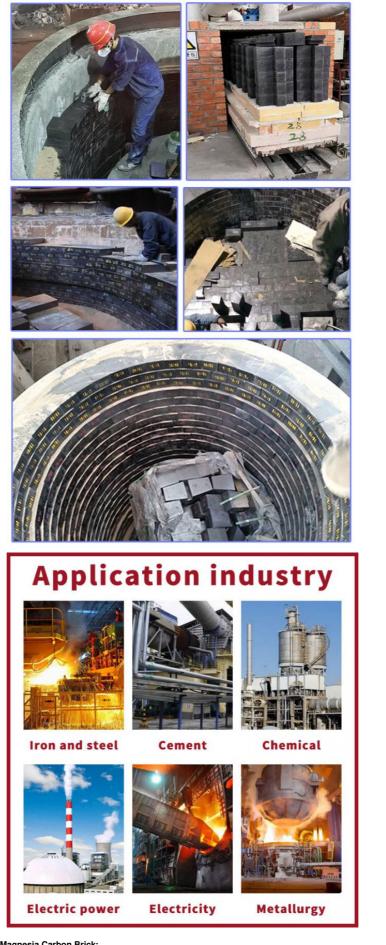

Index Item LMT70 LMT75 LMT65 LMT60 $AI_2O_3\,\%$ ≥75 ≥70 ≥65 ≥60 Al₂O₃+MgO % ≥81 ≥77 ≥80 ≥75 C % ≥5 ≥5 ≥7 ≥7

Apparent porosity %	≤7	≤7	≤7	≤7
Bulk density g/cm ³	≥3.2	≥3.15	≥3.1	≥3.0
Cold Crushing Strength MPa	≥60	≥60	≥60	≥50

Henan Rongsheng Xinwei New Materials Research Institute Co., Ltd

C +86-18538509097 S Jackyhan2023@outlook.com bricksrefractory.com

11th Floors, Building 6, China Central Electronic Commerce Port, Daxue Road, Zhengzhou, Henan, China