


Fused High Zirconia Bricks For Glass Furnaces With High Corrosion Resistance

Our Product Introduction

for more products please visit us on bricksrefractory.com

Basic Information

- Place of Origin: Zhengzhou, China
- Brand Name: Rongsheng Xinwei
- Certification: ISO9001
- Model Number: RSGZ-1, RSGZ-2
- Minimum Order Quantity: 1 Ton
- Price: 200-800 USD
- Packaging Details: Packed on wooden pallets, with water-proof cover, and tightened with plastic/steel bandages
- Delivery Time: 10-20 Days
- Payment Terms: TT L/C
- Supply Ability: 2000tons /month



Product Specification


- Shape: Rectangular
- Bulk Density: 2.0-2.25 G/cm³
- Model Number: Customer's Requirement
- Package: Wooden Pallets With Plastic Film Or As Per Customer's Requirement
- Softening Temperature: High/Medium/Low
- Type: Preheating Furnace, Electric Arc Furnace
- Color: Red
- Origin: China
- Volume Density: $\geq 2.20 \text{ g/cm}^3$
- Condition: Brand New
- Abrasion Resistance: $\leq 0.6 \text{ cm}^3$
- Density: 2.3g/cm³
- Model: As Required
- Thermal Capacity: High

Product Description

Product Description of Fused High Zirconia Bricks For Glass Furnaces With High Corrosion Resistance

Fused high zirconia bricks are high zirconium refractories cast by melting high-purity raw materials through a special process. The crystal structure of fused high zirconia bricks is mainly composed of baddeleyite, so it has extremely high corrosion resistance, low foaming rate and concretion rate, and hardly pollutes the molten glass. Fused high zirconia bricks are suitable for all kinds of glass furnaces, especially high-quality glass furnaces and special glass furnaces, such as a single crystal substrate glass furnaces, high alumina glass furnaces, borosilicate glass furnaces, halogen lighting glass furnace, glass porcelain furnace, glass fiber furnace, etc.

Our Product Introduction

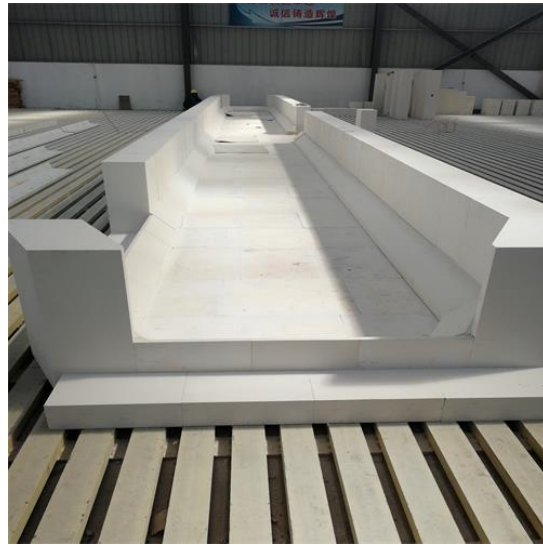

Product Specification of Fused High Zirconia Bricks For Glass Furnaces With High Corrosion Resistance

Item	RSGZ-1	RSGZ-2
ZrO ₂ , % ≥	88	93.2
SiO ₂ , % ≤	9.5	5.0
Al ₂ O ₃ +TiO ₂ +Fe ₂ O ₃ +K ₂ O+Na ₂ O	2.0	1.8
BD,g/cm ³ ≥	5.00	5.10
AP,% ≤	1.0	1.0
0.2MPa RUL, ≥	1700	1700
CCS,MPa ≥	400	400
Erosion Speed, mm/24h ≤	0.8	0.8
CCS,MPa ≥	400	400
Glass Phase Exudation,%≤	0.4	0.4
TC,W/m-K, 600°C	3.0	3.0
TC,W/m-K, 600°C	2.8	2.8
Coefficient ofThermal Expansion,%, 1000°C	0.65	0.70
Coefficient ofThermal Expansion,%, 1500°C	0.10	0.20



Henan Rongsheng Xinwei New Materials Research Institute Co., Ltd



+86-18538509097



Jackyhan2023@outlook.com



bricksrefractory.com

11th Floors, Building 6, China Central Electronic Commerce Port, Daxue Road, Zhengzhou, Henan, China